

ROLLNLOCK

EN Pulley / rope clamp
IT Carrucola / bloccante
FR Poulie / bloqueur
DE Seilrolle / Seilklemme
ES Polea / bloqueador
PT Roldana / bloqueador
SE Blocket / repklämman
NO Trinsen / tauklemmen
JP ブーリー/ロッキング


Ref. No. 2D652
80 g

MADE IN ITALY
EN 12278:2007
EN 567:1997
CE 0333

89/686/CEE -
Personal Protective Equipment against falls from a height.



ISTI2-2D652CT Rev.4 07-14




by Aludesign S.p.A. via Torchio 22
I 24034 Cisano B.sco BG ITALY
Central tel: +39 035 78 35 95
Central fax: +39 035 78 23 39
www.climbingtechnology.com

0 TRACEABILITY

individual serial number
AAAA - DDD - YY
progressive number day of manufacture year of manufacture


1 COMPATIBILITY.

1.1

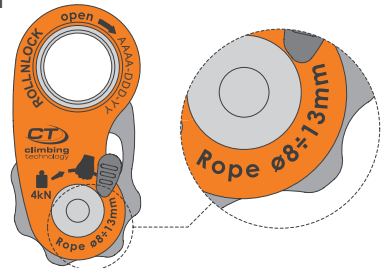


For use with:
Ropes EN 892 / EN1891 Ø 8 ÷ 13 mm.
Webbing 10÷16 mm (Attention! Exceptional use, not to be used for the protection against falls from a height!)

1.2




2 NOMENCLATURE OF PARTS

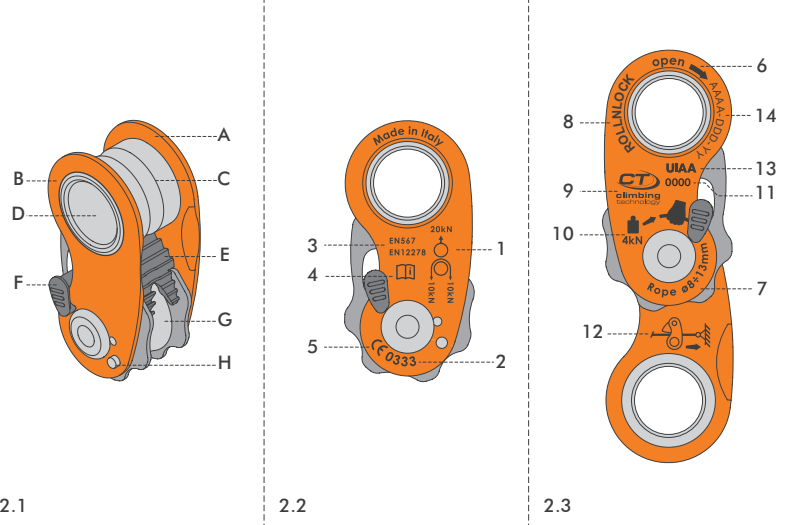


3 ROPE CLAMP MODE INSTALLATION

Raise the mobile side plate and turn 180° to open it out. Feed the rope through in the correct direction, then turn the side plate to the closed position. Insert the connector in the hole and connect it to the harness.

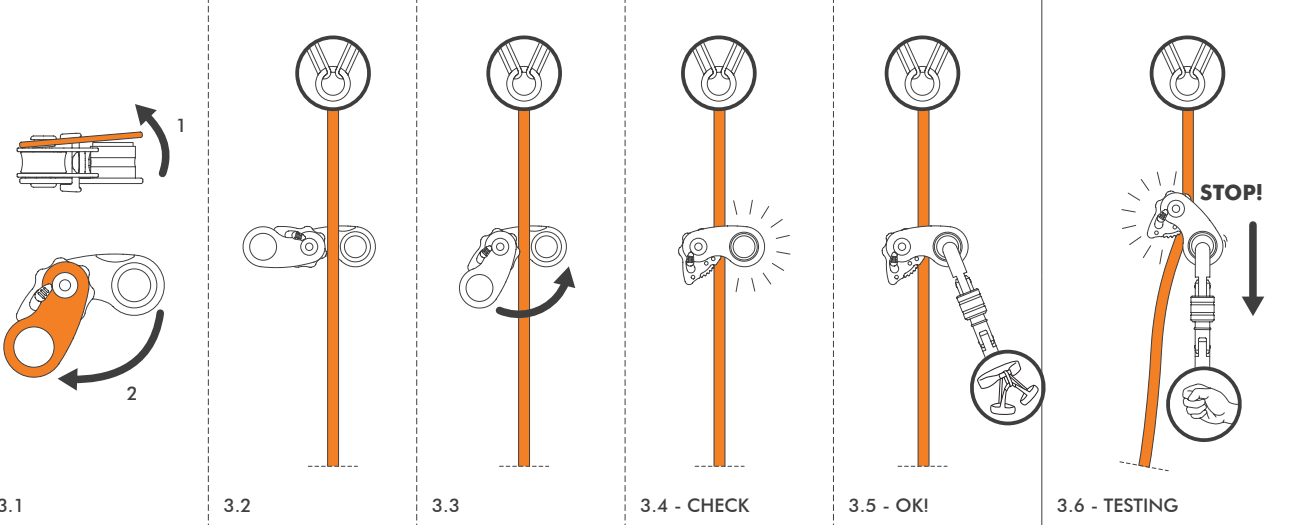


4 ROPE CLAMP MODE INSTRUCTIONS FOR USE

Ideal for ascending a rope. It can be used also for short descents.

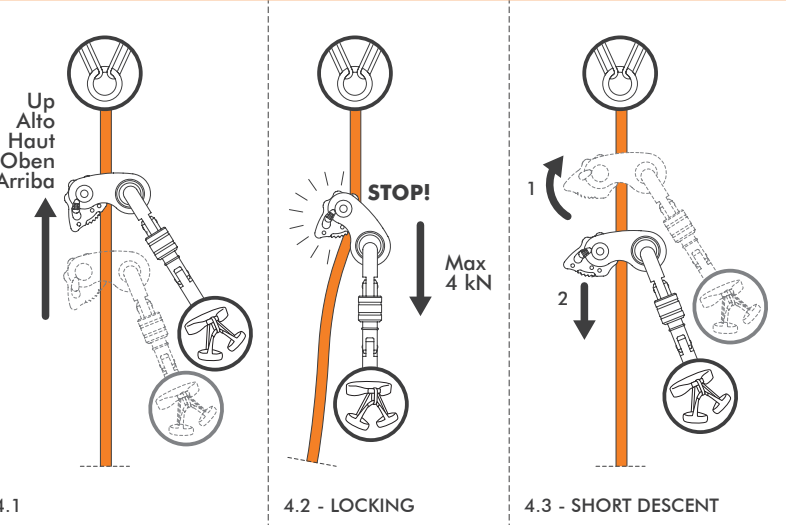


9 HAULING PULLEY MODE EXAMPLE OF USE

Example of use: self-ascending from a crevasse, crevasse rescue in case the alpinist is able to cooperate, crevasse rescue of an alpinist that is unable to cooperate.

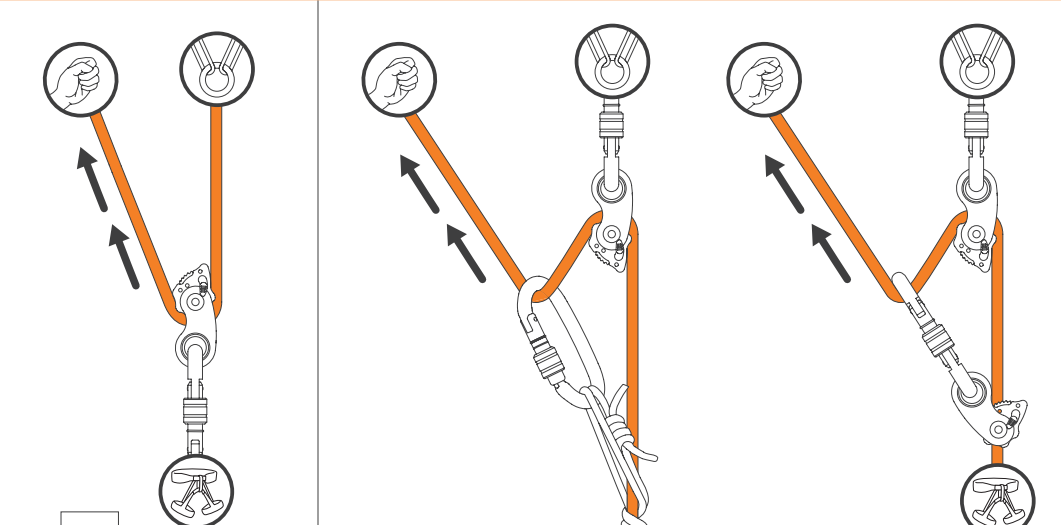


5 HAULING PULLEY MODE INSTALLATION

Install correctly the device and connect it to the anchor point. Before the use check that the device operates correctly and the rope is in the right direction.

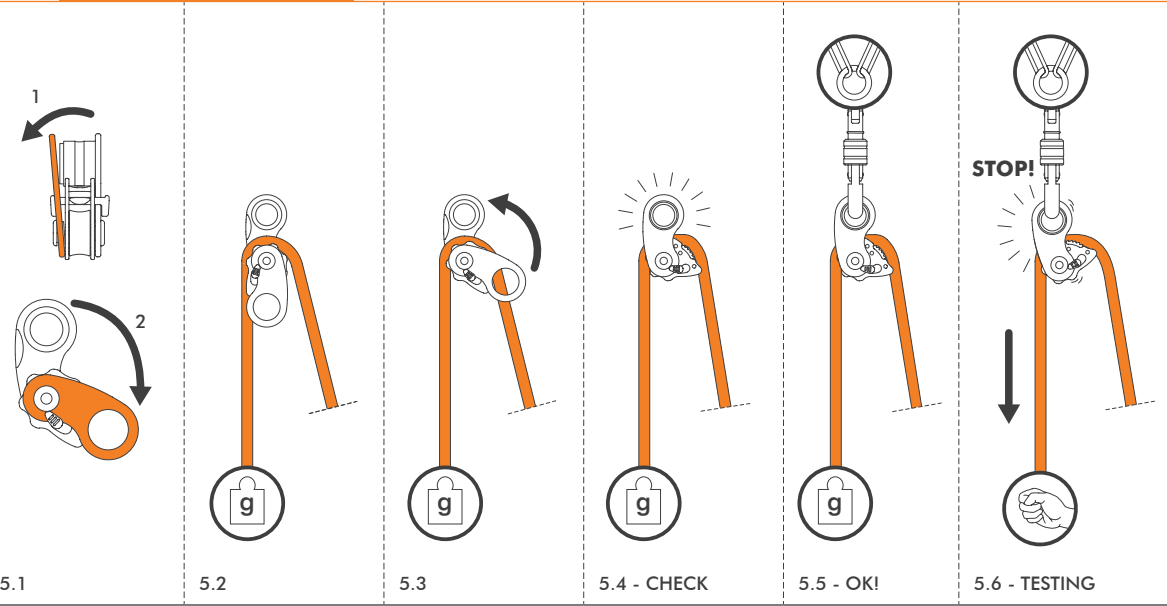


6 HAULING PULLEY MODE INSTRUCTIONS FOR USE

The device allows the rope to slide in one way and locks in the opposite. Ideal for hauling loads or rescuing persons.

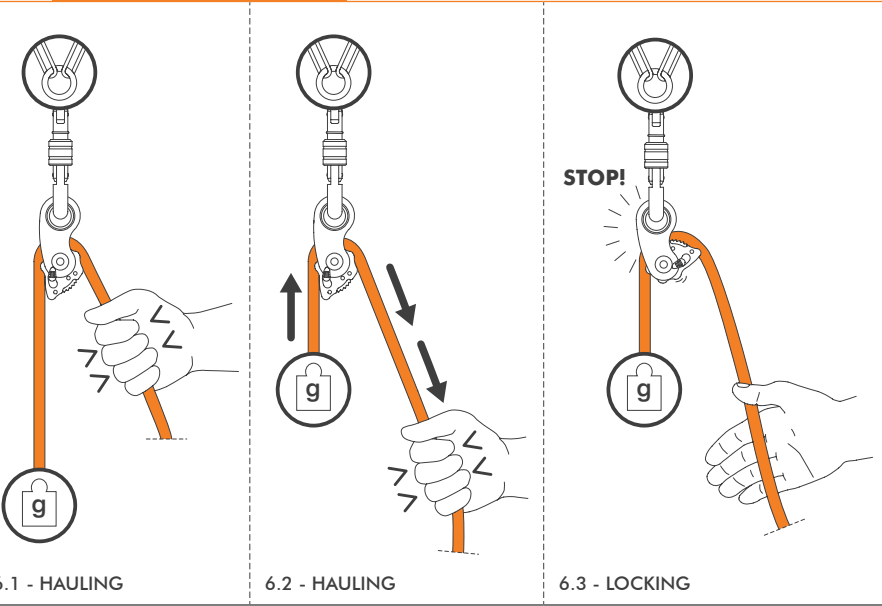


7 SIMPLE PULLEY MODE INSTALLATION AND USE

To switch from hauling pulley mode to simple pulley mode, move the sheave position lever until it engages the pin. It works as a pulley.

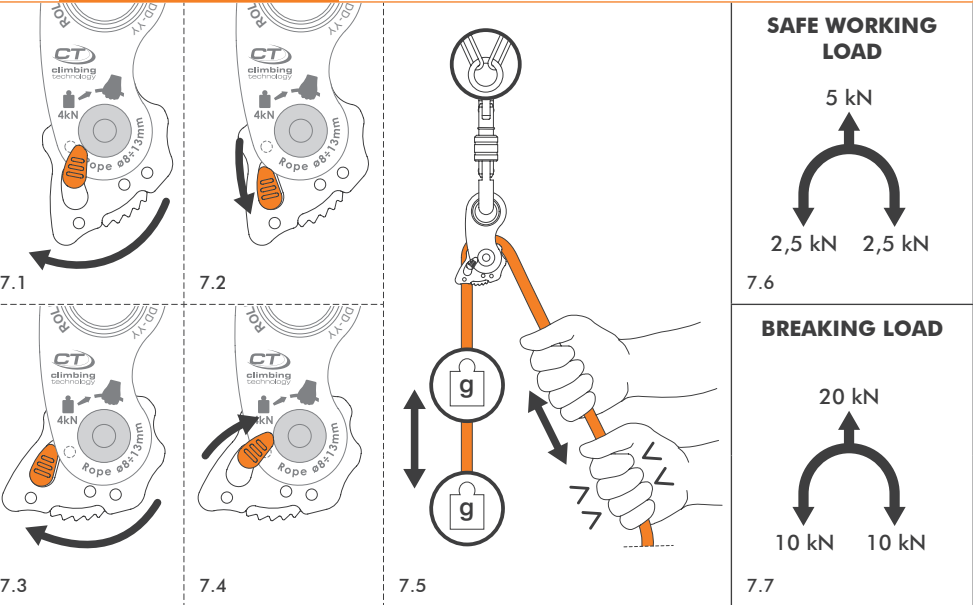

8 SLING ADJUSTMENT MODE INSTALLATION AND USE

In exceptional cases, the device can be employed for the length adjustment of a lanyard or a daisy chain, connected to the harness by means of a knot.

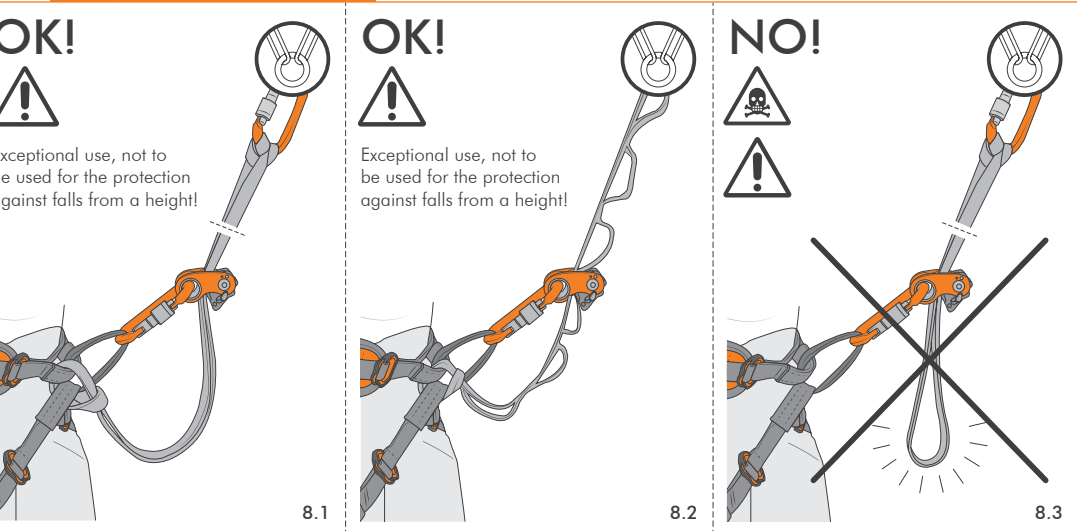

11

